

A green tractor is shown working in an orange grove. The trees are covered with ripe, orange fruit. A large, white, protective net is draped over the top of the grove, creating a tunnel-like structure. The tractor is positioned in the center of the frame, moving through the rows of trees. The overall scene is bright and vibrant, with a focus on agricultural machinery and fruit production.

TRACTOR RANGE

FERRARI

THE MOST COMPLETE RANGE

The FERRARI range of specialized tractors consists of high-performance, reliable and multifunctional machines with small dimensions and high manoeuvrability.

The structural characteristics with short wheelbase and low centre of gravity, combined with the power of the engines and exclusive technologies, make FERRARI tractors indispensable in row crops, vineyards, orchards, greenhouses and in mowing fodder in hilly or mountainous areas, as well as making them appreciated by municipalities for green maintenance work, street cleaning and snow removal.

Equipped with approved cabs, FERRARI tractors feature a comfortable and cosy driving position.

Design, ergonomics and safety are also mixed in an original and exclusive way.

AVAILABLE VERSIONS

AR - Chassis with central articulation, narrow wheel track and contained turning radii.

RS - Chassis with steering wheels, stability and adherence for use also in sloping areas.

DUALSTEER® - Chassis with central articulation and steering wheels for unrivalled manoeuvrability in tight spaces.

MT - Chassis with steering wheels, configured for mowing fodder on hills and mountains.



INDEX

FULL ELECTRIC

100% electric tractors

e-ASTRAL	4
----------------	---

ISODIAMETRIC

Tractors with four equal wheels and a cantilevered engine

CROMO 35	6
CROMO 35 JUNIOR	8
CROMO 35 JUNIOR MICRO	10
COBRAM 60	12
COBRAM 60 MICRO	14
ASTRAL 65	16
MIZAR 70	18
THOR 85	20
THOR K90	22
VEGA 85	24
VEGA 85 AI-TRACTOR	26
VEGA K90	28
VEGA K90 AI-TRACTOR	30

DIFFERENTIATED WHEELS

Tractors with unequal wheels and a cantilevered engine

STELLAR 85	32
STELLAR K90	34
DRACO 85	36
DRACO K90	38
SKY JUMP K90	40






COMPACT

Traditional short wheelbase tractors

RAPTOR 35	42
-----------------	----

e-ASTRAL



-  AVAILABLE VERSIONS
AR - RS
-  TRANSMISSION
12 + 12
-  POWER
41 kW
-  REAR LIFTING CAPACITY
1510 kg
-  DRIVING POSITION
Monodirectional or Reversible

ELECTRIC ENGINE

TOTAL INSTALLED ELECTRICAL POWER: 41 KW


BATTERIES	Lithium
VOLTAGE	48 V
CAPACITY	36 kWh

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 12 FWD + 12 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	Permanent four-wheel drive
REAR PTO	540/540E rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and dedicated electric engine, up to 8 rear hydraulic outlets
REAR LIFTING CAPACITY	1510 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with mechanical control, acting on the rear wheels
DRIVING POSITION	Mono: semi-platform. Rev: rotating platform suspended on silent blocks and twin pedal assembly
CABIN	Optional. 'Vista Clima' four-post frame

MAIN OPTIONS

-  JOYSTICK
-  CABIN
-  SELF-CLEANING SYSTEM™
-  WORK LIGHTS

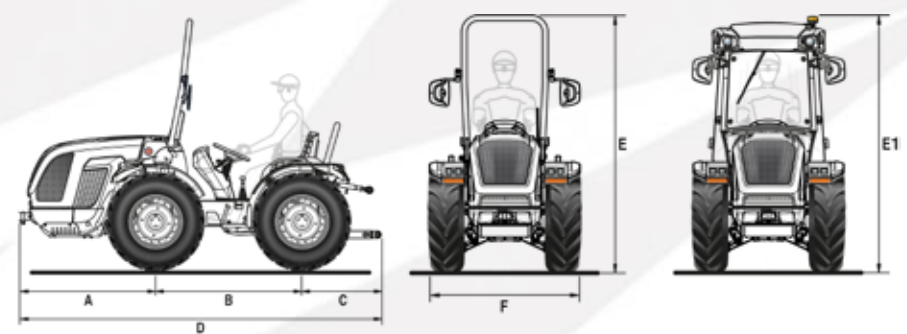






	A	B	C	D	E (with roll-bar)	E1 (with cab)	F	WEIGHT (roll-bar / cab)
AR	1248	1390	779	3417	2195 / 2270	2061 / 2106	1002	1660 / 1740
RS	1248	1390	779	3417	2195 / 2270	2061 / 2106	1207	1680 / 1785

Dimensions in mm (min / max) - Weight in kg

ISODIAMETRIC TRACTOR

CROMO 35




-  AVAILABLE VERSIONS
AR - RS
-  TRANSMISSION
8 + 4
-  POWER
25 hp
-  REAR LIFTING CAPACITY
950 kg
-  DRIVING POSITION
Monodirectional

ENGINE

KUBOTA, 3-cylinder	
DISPLACEMENT	1123 cc
POWER	18.5 kW / 25 hp @3000 rpm
MAX TORQUE	71.5 Nm @2200 rpm

TECHNICAL DATA

TRANSMISSION	Gearbox 8 FWD + 4 REV speeds with easy gear engagement
SYNCHRONISED REVERSER	No
CLUTCH	Dry single disc
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	Permanent four-wheel drive
REAR PTO	540 rpm and synchronised
HYDRAULIC SYSTEM	Single-circuit, up to 6 rear hydraulic outlets
REAR LIFTING CAPACITY	950 kg (at the ball joint)
SERVICE BRAKES	Drum brakes acting on rear wheels
DRIVING POSITION	Footstep. Gearbox levers positioned under the steering wheel to allow maximum accessibility
CABIN	Not available

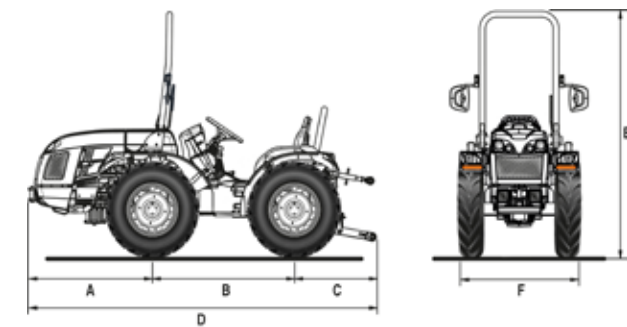

	A	B	C	D	E	F	WEIGHT
AR	968	1200	775	2943	1980 / 2010	989 / 1391	1040
RS	968	1200	775	2943	1980 / 2010	1069 / 1391	1060

Dimensions in mm (min / max) - Weight in kg

MAIN
OPTIONS








INDEPENDENT
PTO
(RS only)

ISODIAMETRIC TRACTOR

CROMO JUNIOR 35



-  AVAILABLE VERSIONS
RS
-  TRANSMISSION
8 + 4
-  POWER
25 hp
-  REAR LIFTING CAPACITY
500 kg
-  DRIVING POSITION
Monodirectional





ENGINE

KUBOTA, 3-cylinder	
DISPLACEMENT	1123 cc
POWER	18.5 kW / 25 hp @3000 rpm
MAX TORQUE	71.5 Nm @2200 rpm

TECHNICAL DATA

TRANSMISSION	Gearbox 8 FWD + 4 REV speeds with easy gear engagement
SYNCHRONISED REVERSER	No
CLUTCH	Dry single disc
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	Permanent four-wheel drive
REAR PTO	540 rpm and synchronised
HYDRAULIC SYSTEM	Single-circuit, up to 2 rear hydraulic outlets
REAR LIFTING CAPACITY	500 kg (at the ball joint) - 950 kg (at the ball joint) with optional rear lift with two cylinders
SERVICE BRAKES	Drum brakes acting on rear wheels
DRIVING POSITION	Footstep. Gearbox levers positioned under the steering wheel to allow maximum accessibility
CABIN	Not available

MAIN OPTIONS

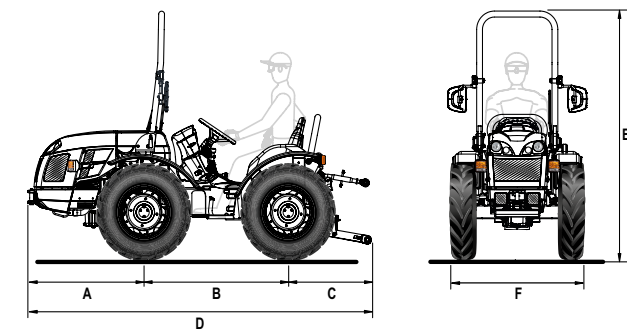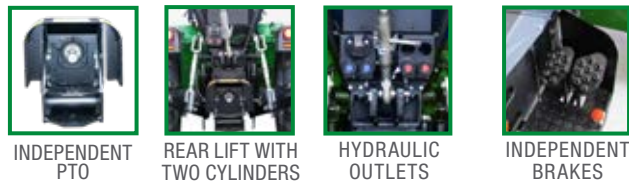

	A	B	C	D	E	F	WEIGHT
RS	968	1200	775	2943	1980 / 2010	1069 / 1391	1060






Dimensions in mm (min / max) - Weight in kg

ISODIAMETRIC TRACTOR

CROMO JUNIOR 35

V/micro



-  AVAILABLE VERSIONS
AR
-  TRANSMISSION
8 + 4
-  POWER
25 hp
-  REAR LIFTING CAPACITY
500 kg
-  DRIVING POSITION
Monodirectional

MAIN
OPTIONS



REAR LIFT WITH
TWO CYLINDERS



HYDRAULIC
OUTLETS

ENGINE

KUBOTA, 3-cylinder

DISPLACEMENT

1123 cc

POWER

18.5 kW / 25 hp @3000 rpm


MAX TORQUE

71.5 Nm @2200 rpm



TECHNICAL DATA

TRANSMISSION	Gearbox 8 FWD + 4 REV speeds with easy gear engagement
SYNCHRONISED REVERSER	No
CLUTCH	Dry single disc
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	Permanent four-wheel drive
REAR PTO	540 rpm and synchronised
HYDRAULIC SYSTEM	Single-circuit, up to 2 rear hydraulic outlets
REAR LIFTING CAPACITY	500 kg (at the ball joint) - 950 kg (at the ball joint) with optional rear lift with two cylinders
SERVICE BRAKES	Drum brakes acting on rear wheels
DRIVING POSITION	Footstep. Gearbox levers positioned under the steering wheel to allow maximum accessibility
CABIN	Not available

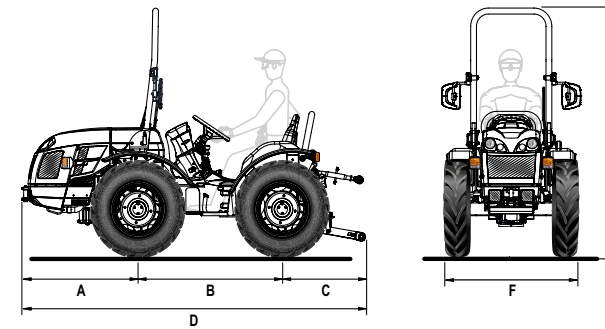

	A	B	C	D	E	F	WEIGHT
AR	968	1200	723	2891	2022 / 2059	770 / 900	975

Dimensions in mm (min / max) - Weight in kg

COBRAM 60







ENGINE


KOHLER, 3-cylinder, Turbo Intercooler Common Rail

DISPLACEMENT	1861 cc
POWER	36 kW / 49 hp @2600 rpm
MAX TORQUE	190 Nm @1500 rpm

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 12 FWD + 12 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	Permanent four-wheel drive
REAR PTO	540 rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps, up to 7 rear hydraulic outlets
REAR LIFTING CAPACITY	1200 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with mechanical control, acting on the rear wheels
DRIVING POSITION	Footstep, monodirectional or reversible with twin pedal assembly
CABIN	Not available

-  AVAILABLE VERSIONS
AR - RS
-  TRANSMISSION
12 + 12
-  POWER
49 hp
-  REAR LIFTING CAPACITY
1200 kg
-  DRIVING POSITION
Monodirectional or Reversible

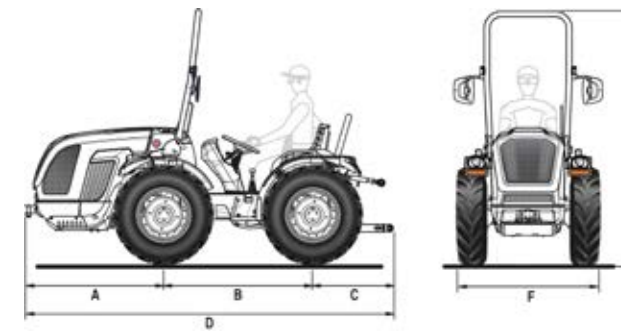

	A	B	C	D	E	F	WEIGHT
AR	1248	1340	779	3367	2185 / 2260	1008 / 1438	1700
RS	1248	1340	779	3367	2185 / 2260	1207 / 1643	1700

Dimensions in mm (min / max) - Weight in kg

MAIN OPTIONS



WORK LIGHTS








SELF-CLEANING SYSTEM™

ISODIAMETRIC TRACTOR

COBRAM 60

1/2 micro



-  AVAILABLE VERSIONS
AR
-  TRANSMISSION
12 + 12
-  POWER
49 hp
-  REAR LIFTING CAPACITY
1200 kg
-  DRIVING POSITION
Reversible

MAIN
OPTIONS



INCREASED
HYDRAULIC
SYSTEM



HYDRAULIC
3rd POINT

ENGINE


KOHLER, 3-cylinder, Turbo Intercooler Common Rail

DISPLACEMENT	1861 cc
POWER	36 kW / 49 hp @2600 rpm
MAX TORQUE	190 Nm @1500 rpm



TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 12 FWD + 12 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	Permanent four-wheel drive
REAR PTO	540 rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps, up to 7 rear hydraulic outlets
REAR LIFTING CAPACITY	1200 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with mechanical control, acting on the rear wheels
DRIVING POSITION	Reversible with rotating platform and twin pedal assembly
CABIN	Not available

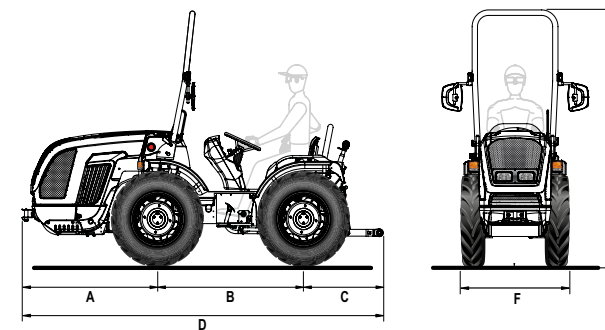






	A	B	C	D	E	F	WEIGHT
AR	1248	1340	779	3367	2181 / 2260	950 / 1394	1550

Dimensions in mm (min / max) - Weight in kg

ASTRAL 65



-  AVAILABLE VERSIONS
AR - RS
-  TRANSMISSION
12 + 12
-  POWER
56 hp
-  REAR LIFTING CAPACITY
1510 kg
-  DRIVING POSITION
Monodirectional or Reversible

MAIN OPTIONS




JOYSTICK



CABIN



SELF-CLEANING SYSTEM™



WORK LIGHTS


ENGINE

KOHLER, 3-cylinder, Turbo Intercooler Common Rail

DISPLACEMENT	1861 cc
POWER	42 kW / 56 hp @2600 rpm
MAX TORQUE	190 Nm @1500 rpm

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 12 FWD + 12 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	Permanent four-wheel drive
REAR PTO	540/540E rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 8 rear hydraulic outlets
REAR LIFTING CAPACITY	1510 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with mechanical control, acting on the rear wheels
DRIVING POSITION	Mono: semi-platform. Rev: rotating platform suspended on silent blocks and twin pedal assembly
CABIN	Optional. 'Vista Clima' four-post frame

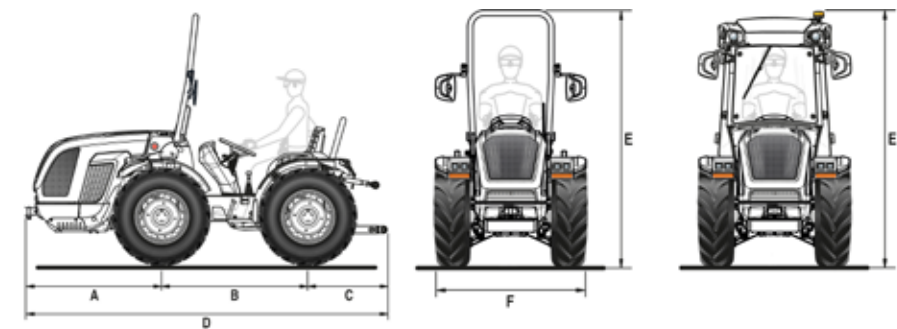





	A	B	C	D	E (with roll-bar)	E1 (with cab)	F	WEIGHT (roll-bar / cab)
AR	1248	1390	779	3417	2195 / 2270	2061 / 2106	1002	1660 / 1740
RS	1248	1390	779	3417	2195 / 2270	2061 / 2106	1207	1680 / 1785

Dimensions in mm (min / max) - Weight in kg

MIZAR 70



-  AVAILABLE VERSIONS
AR - RS - DUALSTEER® - MT
-  TRANSMISSION
12 + 12
-  POWER
63 hp
-  REAR LIFTING CAPACITY
1900 kg
-  DRIVING POSITION
Reversible

MAIN OPTIONS



JOYSTICK



CABIN CAT. 4



SELF-CLEANING SYSTEM™



DUAL FLOATING SYSTEM™

ENGINE

KOHLER, 4-cylinder, Turbo Intercooler Common Rail

DISPLACEMENT	2482 cc
POWER	46 kW / 63 hp @2600 rpm
MAX TORQUE	205 Nm @1500 rpm




TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 12 FWD + 12 REV with Easy Plus™ clutch ⁽¹⁾ and Smart Brake & Go ⁽²⁾
SYNCHRONISED REVERSER	Yes, with Power Clutch System button ⁽³⁾
CLUTCH	Multidisc in oil bath with electronically-managed
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	Permanent four-wheel drive
REAR PTO	540/540E rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 11 rear hydraulic outlets
REAR LIFTING CAPACITY	1900 kg (at the ball joint)
SERVICE BRAKES	Oil bath discs with hydrostatic control, acting on the rear wheels
DRIVING POSITION	Rotating platform suspended on silent blocks and suspended pedals
CABIN	Optional. 'Vista' or 'Vista Pro' pressurised and homologated cat. 4

⁽¹⁾ Software-assisted clutch operation for always progressive and jerk-free engagement.

⁽²⁾ Enables the tractor to be stopped and restarted using only the brake pedal, without using the clutch.

⁽³⁾ Button for engaging gears and reverser without using the clutch pedal.

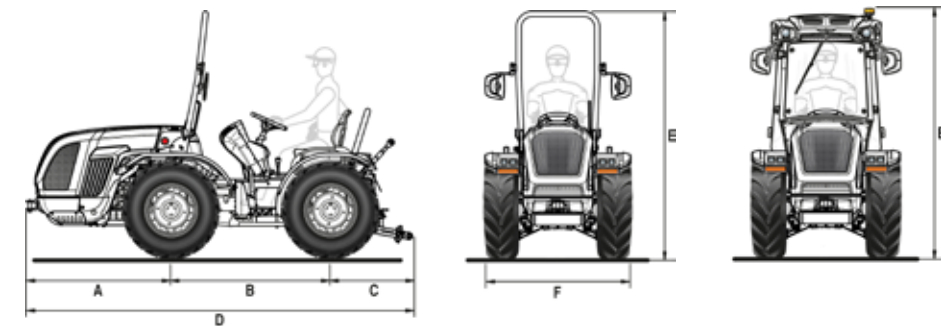






	A	B	C	D	E (with roll-bar)	E1 (with cab)	F	WEIGHT (roll-bar / cab)
AR	1314	1480	800	3594	2215 / 2300	2145 / 2230	1121 / 1525	1770 / 1900
RS	1314	1480	800	3594	2215 / 2300	2145 / 2230	1150 / 1764	1830 / 1960
DS®	1314	1480	800	3594	2215 / 2300	2145 / 2230	1150 / 1764	1830 / 1960
MT	1314	1480	800	3594	-	2145 / 2195	1684 / 1710	1960

Dimensions in mm (min / max) - Weight in kg

THOR 85



-  AVAILABLE VERSIONS
AR - RS
-  TRANSMISSION
16 + 16
-  POWER
75 hp
-  REAR LIFTING CAPACITY
2300 kg
-  DRIVING POSITION
Monodirectional or Reversible


ENGINE

KOHLER, 4-cylinder, Turbo Intercooler Common Rail

DISPLACEMENT	2482 cc
POWER	55.4 kW / 75.3 hp @2300 rpm
MAX TORQUE	300 Nm @1500 rpm

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	Permanent four-wheel drive
REAR PTO	540/540E rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 7 rear hydraulic outlets
REAR LIFTING CAPACITY	2300 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with mechanical control, acting on the rear wheels
DRIVING POSITION	Footstep, monodirectional or reversible with twin pedal assembly
CABIN	Not available

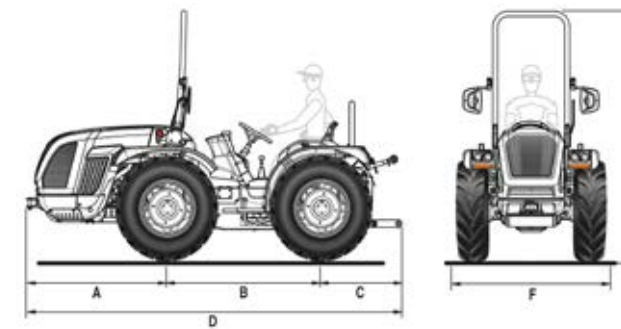

	A	B	C	D	E	F	WEIGHT
AR	1365	1450	925	3740	2240 / 2350	1125 / 1707	2170
RS	1365	1450	925	3740	2240 / 2364	1291 / 1961	2090

Dimensions in mm (min / max) - Weight in kg

MAIN OPTIONS



FRONT LIFT



WORK LIGHTS



SELF-CLEANING SYSTEM™

THOR K90



AVAILABLE VERSIONS
AR - RS



TRANSMISSION
16 + 16



POWER
75 hp



REAR LIFTING CAPACITY
2300 kg



DRIVING POSITION
Monodirectional or Reversible



FRONT LIFT

ENGINE


KUBOTA, 4-cylinder, Turbo Common Rail

DISPLACEMENT	3769 cc
POWER	54.6 kW / 75 hp @2400 rpm
MAX TORQUE	305.4 Nm @1500 rpm



TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	Permanent four-wheel drive
REAR PTO	540/540E rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 7 rear hydraulic outlets
REAR LIFTING CAPACITY	2300 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with mechanical control, acting on the rear wheels
DRIVING POSITION	Footstep, monodirectional or reversible with twin pedal assembly
CABIN	Not available

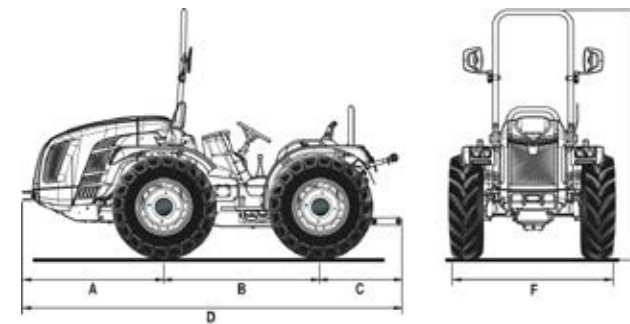





	A	B	C	D	E	F	WEIGHT
AR	1348	1450	927	3725	2254 / 2364	1125 / 1707	2150
RS	1348	1450	927	3725	2254 / 2364	1368 / 1961	2150

Dimensions in mm (min / max) - Weight in kg

VEGA 85



-  **AVAILABLE VERSIONS**
AR - RS - DUALSTEER® - MT
-  **TRANSMISSION**
16 + 16
-  **POWER**
75 hp
-  **REAR LIFTING CAPACITY**
2300 kg
-  **DRIVING POSITION**
Reversible

ENGINE


KOHLER, 4-cylinder, Turbo Intercooler Common Rail

DISPLACEMENT	2482 cc
POWER	55.4 kW / 75.3 hp @2300 rpm
MAX TORQUE	300 Nm @1500 rpm

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV with Easy Plus™ clutch ⁽¹⁾ and Smart Brake & Go ⁽²⁾
SYNCHRONISED REVERSER	Yes, with Power Clutch System button ⁽³⁾
CLUTCH	Multidisc in oil bath with electronically-managed
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	4WD with front-wheel drive disengagement
REAR PTO	540/540E rpm (MT version: 540/1000 rpm), independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 13 rear hydraulic outlets
REAR LIFTING CAPACITY	2300 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with hydrostatic control, acting on four wheels
DRIVING POSITION	Rotating platform suspended on silent blocks and suspended pedals
CABIN	Optional. 'Space Clima' six-post frame or 'Vista Pro' four-post frame with conical profile, pressurised and cat. 4 approved

⁽¹⁾ Software-assisted clutch operation for always progressive and jerk-free engagement.
⁽²⁾ Enables the tractor to be stopped and restarted using only the brake pedal, without using the clutch.
⁽³⁾ Button for engaging gears and reverser without using the clutch pedal.

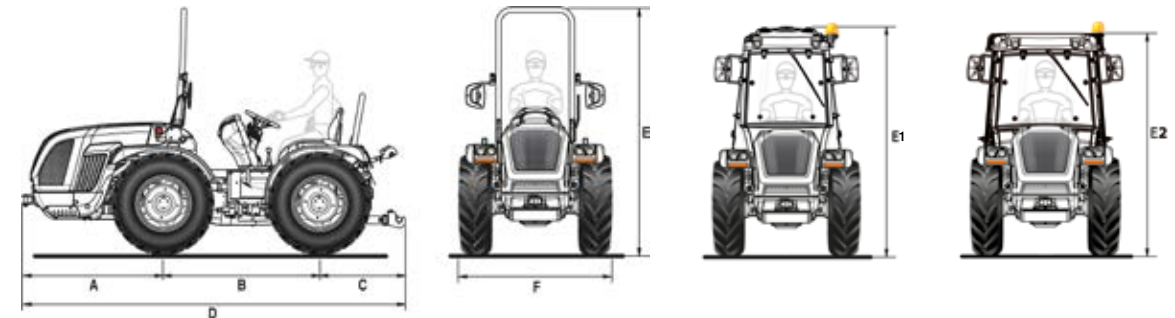

	A	B	C	D	E (with roll-bar)	E1 (with Vista cab)	E2 (with Space cab)	F	WEIGHT (roll-bar / cab)
AR	1365	1495	930	3790	2254 / 2364	2235 / 2345	-	1127 / 1603	2240 / 2390
RS	1365	1495	930	3790	2254 / 2364	2235 / 2345	2070 / 2180	1291 / 1961	2320 / 2470
DS®	1365	1495	930	3790	2254 / 2364	2235 / 2345	-	1291 / 1961	2390 / 2540
MT	1365	1495	930	3790	-	-	2070 / 2180	1697 / 1961	2500

Dimensions in mm (min / max) - Weight in kg

MAIN OPTIONS



POWER SHUTTLE EASYDRIVE®



JOYSTICK



FRONT LIFT



CABIN CAT. 4








SELF CLEANING SYSTEM™

VEGA 85

Ai-TRACTOR
ARTIFICIAL INTELLIGENCE



-  **AVAILABLE VERSIONS**
AR - RS - DUALSTEER® - MT
-  **TRANSMISSION**
16 + 16 with EasyDrive®
-  **POWER**
75 hp
-  **REAR LIFTING CAPACITY**
2300 kg
-  **DRIVING POSITION**
Reversible

**MAIN
OPTIONS**



JOYSTICK



FRONT LIFT



CABIN
CAT. 4



SELF-CLEANING
SYSTEM™

ENGINE

KOHLER, 4-cylinder, Turbo Intercooler Common Rail

DISPLACEMENT	2482 cc
POWER	55.4 kW / 75.3 hp @2300 rpm
MAX TORQUE	300 Nm @1500 rpm




TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV with Easy Plus™ clutch ⁽¹⁾ and 'Artificial Intelligence' ⁽²⁾
SYNCHRONISED REVERSER	Yes, with standard electro-hydraulic power shuttle EasyDrive®
CLUTCH	Multidisc in oil bath with electronically-managed
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	4WD with front-wheel drive disengagement
REAR PTO	540/540E rpm (MT version: 540/1000 rpm), independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 13 rear hydraulic outlets
REAR LIFTING CAPACITY	2300 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with hydrostatic control, acting on four wheels and hill start assist
DRIVING POSITION	Rotating platform suspended on silent blocks and suspended pedals
CABIN	Optional. 'Space Clima' six-post frame or 'Vista Pro' four-post frame with conical profile, pressurised and cat. 4 approved

⁽¹⁾ Software-assisted clutch operation for always progressive and jerk-free engagement.

⁽²⁾ Intelligent system that optimises the management of the electro-hydraulic reverser, clutch and brakes through 4 driving modes.

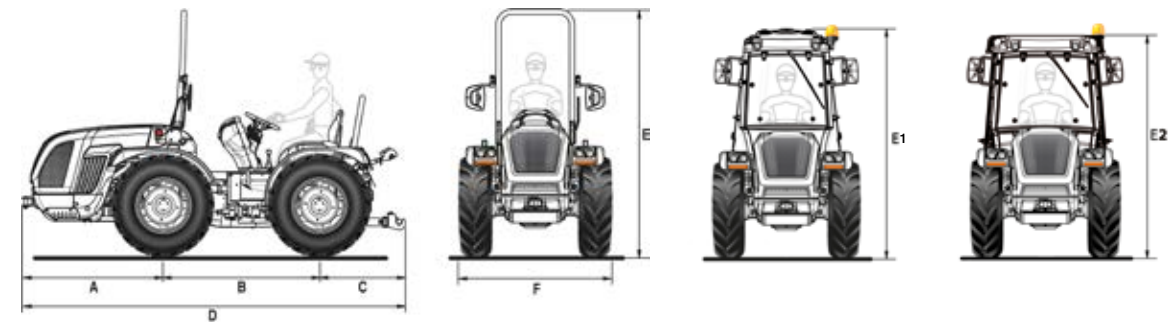






	A	B	C	D	E (with roll-bar)	E1 (with Vista cab)	E2 (with Space cab)	F	WEIGHT (roll-bar / cab)
AR	1365	1495	930	3790	2254 / 2364	2235 / 2345	-	1127 / 1603	2240 / 2390
RS	1365	1495	930	3790	2254 / 2364	2235 / 2345	2070 / 2180	1291 / 1961	2320 / 2470
DS®	1365	1495	930	3790	2254 / 2364	2235 / 2345	-	1291 / 1961	2390 / 2540
MT	1365	1495	930	3790	-	-	2070 / 2180	1697 / 1961	2500

Dimensions in mm (min / max) - Weight in kg

VEGA K90




-  AVAILABLE VERSIONS
AR - RS - DUALSTEER® - MT
-  TRANSMISSION
16 + 16
-  POWER
75 hp
-  REAR LIFTING CAPACITY
2300 kg
-  DRIVING POSITION
Reversible

ENGINE

KUBOTA, 4-cylinder, Turbo Common Rail	
DISPLACEMENT	3769 cc
POWER	54.6 kW / 75 hp @2400 rpm
MAX TORQUE	305.4 Nm @1500 rpm

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath with electronically-managed
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	4WD with front-wheel drive disengagement
REAR PTO	540/540E rpm (MT version: 540/1000 rpm), independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 13 rear hydraulic outlets
REAR LIFTING CAPACITY	2300 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with hydrostatic control, acting on four wheels
DRIVING POSITION	Rotating platform suspended on silent blocks and suspended pedals
CABIN	Optional. 'Space Clima' six-post frame or 'Vista Pro' four-post frame with conical profile, pressurised and cat. 4 approved

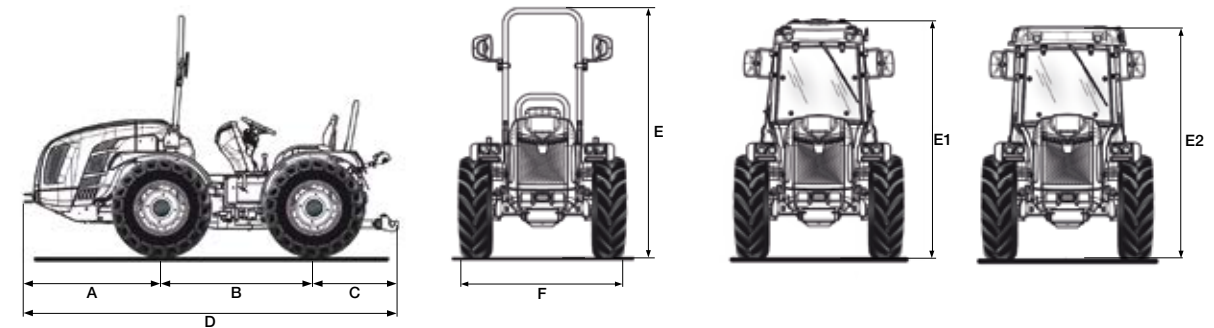

	A	B	C	D	E (with roll-bar)	E1 (with Vista cab)	E2 (with Space cab)	F	WEIGHT (roll-bar / cab)
AR	1348	1495	932	3775	2254 / 2364	2235 / 2345	-	1127 / 1603	2300 / 2450
RS	1348	1495	932	3775	2254 / 2364	2235 / 2345	2070 / 2180	1291 / 1961	2380 / 2530
DS®	1348	1495	932	3775	2254 / 2364	2235 / 2345	-	1291 / 1961	2450 / 2580
MT	1348	1495	932	3775	-	-	2070 / 2180	1697 / 1961	2560

Dimensions in mm (min / max) - Weight in kg

MAIN OPTIONS



POWER SHUTTLE EASYDRIVE®



JOYSTICK



FRONT LIFT








CABIN CAT. 4

ISODIAMETRIC TRACTOR

VEGA K90

Ai-TRACTOR
ARTIFICIAL INTELLIGENCE



-  AVAILABLE VERSIONS
AR - RS - DUALSTEER®
-  TRANSMISSION
16 + 16 with EasyDrive®
-  POWER
75 hp
-  REAR LIFTING CAPACITY
2300 kg
-  DRIVING POSITION
Reversible

MAIN
OPTIONS



JOYSTICK



FRONT LIFT



CABIN
CAT. 4

ENGINE

KUBOTA, 4-cylinder, Turbo Common Rail

DISPLACEMENT	3769 cc
POWER	54.6 kW / 75 hp @2400 rpm
MAX TORQUE	305.4 Nm @1500 rpm




TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV with Easy Plus™ clutch ⁽¹⁾ and 'Artificial Intelligence' ⁽²⁾
SYNCHRONISED REVERSER	Yes, with standard electro-hydraulic power shuttle EasyDrive®
CLUTCH	Multidisc in oil bath with electronically-managed
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	4WD with front-wheel drive disengagement
REAR PTO	540/540E rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 13 rear hydraulic outlets
REAR LIFTING CAPACITY	2300 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with hydrostatic control, acting on four wheels and hill start assist
DRIVING POSITION	Rotating platform suspended on silent blocks and suspended pedals
CABIN	Optional. 'Space Clima' six-post frame or 'Vista Pro' four-post frame with conical profile, pressurised and cat. 4 approved

⁽¹⁾ Software-assisted clutch operation for always progressive and jerk-free engagement.

⁽²⁾ Intelligent system that optimises the management of the electro-hydraulic reverser, clutch and brakes through 4 driving modes.

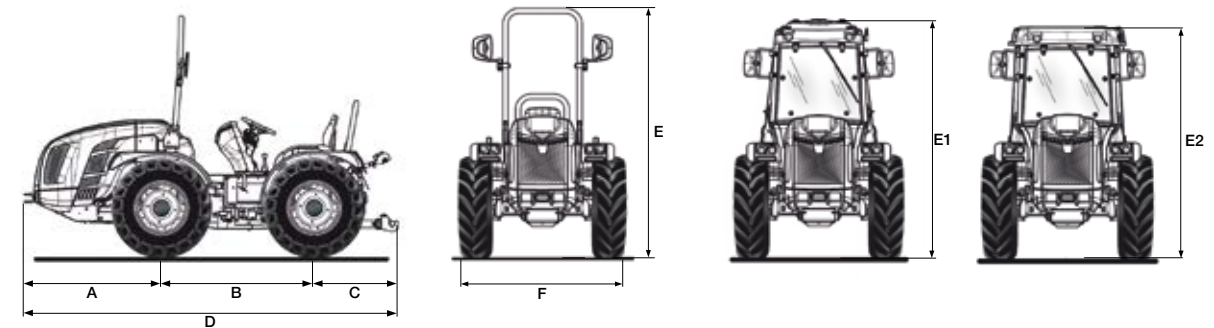

	A	B	C	D	E (with roll-bar)	E1 (with Vista cab)	E2 (with Space cab)	F	WEIGHT (roll-bar / cab)
AR	1348	1495	932	3775	2254 / 2364	2235 / 2345	-	1127 / 1603	2300 / 2450
RS	1348	1495	932	3775	2254 / 2364	2235 / 2345	2070 / 2180	1291 / 1961	2380 / 2530
DS®	1348	1495	932	3775	2254 / 2364	2235 / 2345	-	1291 / 1961	2450 / 2580

Dimensions in mm (min / max) - Weight in kg

TRACTOR WITH DIFFERENTIATED WHEELS

STELLAR 85








ENGINE


KOHLER, 4-cylinder, Turbo Intercooler Common Rail

DISPLACEMENT	2482 cc
POWER	55.4 kW / 75.3 hp @2300 rpm
MAX TORQUE	300 Nm @1500 rpm

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	4WD with front-wheel drive disengagement
REAR PTO	540/540E rpm, independent and synchronised. Engagement control positioned on the right mudguard
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 7 rear hydraulic outlets
REAR LIFTING CAPACITY	2700 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with mechanical control, acting on the rear wheels
DRIVING POSITION	Footstep. Gearbox levers positioned under the steering wheel to allow maximum accessibility
CABIN	Optional. 'Compact Pro' ultra-low profile (minimum height 170 cm), pressurised and cat. 4 approved


-  AVAILABLE VERSIONS
RS
-  TRANSMISSION
16 + 16
-  POWER
75 hp
-  REAR LIFTING CAPACITY
2700 kg
-  DRIVING POSITION
Monodirectional

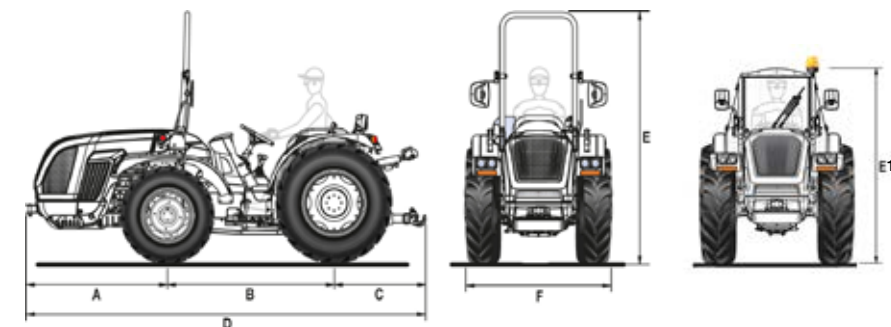


	A	B	C	D	E (with roll-bar)	E1 (with cab)	F	WEIGHT (roll-bar / cab)
RS	1365	1607	963	3935	2195 / 2320	1708 / 1783	1363 / 1908	2260 / 2380

Dimensions in mm (min / max) - Weight in kg

MAIN
OPTIONS



WORK LIGHTS



SELF-CLEANING
SYSTEM™



24" WHEELS








CABIN
CAT. 4

TRACTOR WITH DIFFERENTIATED WHEELS

STELLAR K90



-  AVAILABLE VERSIONS
RS
-  TRANSMISSION
16 + 16
-  POWER
75 hp
-  REAR LIFTING CAPACITY
2700 kg
-  DRIVING POSITION
Monodirectional

MAIN
OPTIONS



24" WHEELS



CABIN CAT. 4


ENGINE

KUBOTA, 4-cylinder, Turbo Common Rail

DISPLACEMENT	3769 cc
POWER	54.6 kW / 75 hp @2400 rpm
MAX TORQUE	305.4 Nm @1500 rpm

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	4WD with front-wheel drive disengagement
REAR PTO	540/540E rpm, independent and synchronised. Engagement control positioned on the right mudguard
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 7 rear hydraulic outlets
REAR LIFTING CAPACITY	2700 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with mechanical control, acting on the rear wheels
DRIVING POSITION	Footstep. Gearbox levers positioned under the steering wheel to allow maximum accessibility
CABIN	Optional. 'Compact Pro' ultra-low profile (minimum height 170 cm), pressurised and cat. 4 approved

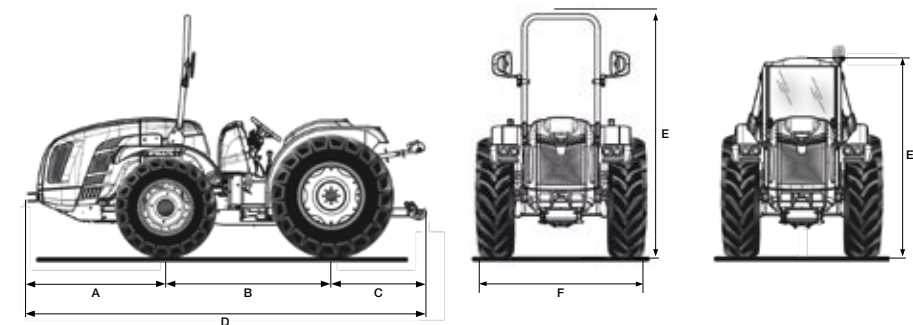






	A	B	C	D	E (with roll-bar)	E1 (with cab)	F	WEIGHT (roll-bar / cab)
RS	1348	1607	963	3918	2195 / 2320	1708 / 1783	1363 / 1908	2450 / 2570

Dimensions in mm (min / max) - Weight in kg

TRACTOR WITH DIFFERENTIATED WHEELS

DRACO 85



-  AVAILABLE VERSIONS
RS - DUALSTEER®
-  TRANSMISSION
16 + 16
-  POWER
75 hp
-  REAR LIFTING CAPACITY
2700 kg
-  DRIVING POSITION
Monodirectional

ENGINE

KOHLER, 4-cylinder, Turbo Intercooler Common Rail

DISPLACEMENT	2482 cc
POWER	55.4 kW / 75.3 hp @2300 rpm
MAX TORQUE	300 Nm @1500 rpm


TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV with Easy Plus™ clutch ⁽¹⁾ and Smart Brake & Go ⁽²⁾
SYNCHRONISED REVERSER	Yes, with Power Clutch System button ⁽³⁾
CLUTCH	Multidisc in oil bath with electronically-managed
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	4WD with front-wheel drive disengagement
REAR PTO	540/540E rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 9 rear hydraulic outlets
REAR LIFTING CAPACITY	2700 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with hydrostatic control, acting on four wheels
DRIVING POSITION	Platform suspended on silent blocks and suspended pedals
CABIN	Optional. 'Compact Pro' low-profile, pressurised and homologated cat. 4

⁽¹⁾ Software-assisted clutch operation for always progressive and jerk-free engagement.

⁽²⁾ Enables the tractor to be stopped and restarted using only the brake pedal, without using the clutch.

⁽³⁾ Button for engaging gears and reverser without using the clutch pedal.

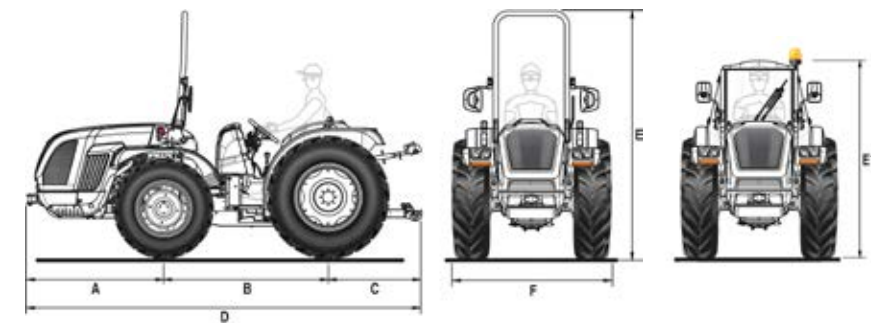

	A	B	C	D	E (with roll-bar)	E1 (with cab)	F	WEIGHT (roll-bar / cab)
RS	1365	1607	963	3935	2216 / 2316	1765 / 1865	1363 / 1878	2460 / 2640
DS®	1365	1607	963	3935	2216 / 2316	1765 / 1865	1363 / 1878	2520 / 2640

Dimensions in mm (min / max) - Weight in kg

MAIN OPTIONS



POWER SHUTTLE EASYDRIVE®



JOYSTICK



FRONT LIFT



CABIN CAT. 4








SELF-CLEANING SYSTEM™

TRACTOR WITH DIFFERENTIATED WHEELS

DRACO K90



-  AVAILABLE VERSIONS
RS - DUALSTEER®
-  TRANSMISSION
16 + 16
-  POWER
75 hp
-  REAR LIFTING CAPACITY
2700 kg
-  DRIVING POSITION
Monodirectional


ENGINE

KUBOTA, 4-cylinder, Turbo Common Rail

DISPLACEMENT	3769 cc
POWER	54.6 kW / 75 hp @2400 rpm
MAX TORQUE	305.4 Nm @1500 rpm

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath with electronically-managed
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	4WD with front-wheel drive disengagement
REAR PTO	540/540E rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 9 rear hydraulic outlets
REAR LIFTING CAPACITY	2700 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with hydrostatic control, acting on four wheels
DRIVING POSITION	Platform suspended on silent blocks and suspended pedals
CABIN	Optional. 'Compact Pro' low-profile, pressurised and homologated cat. 4

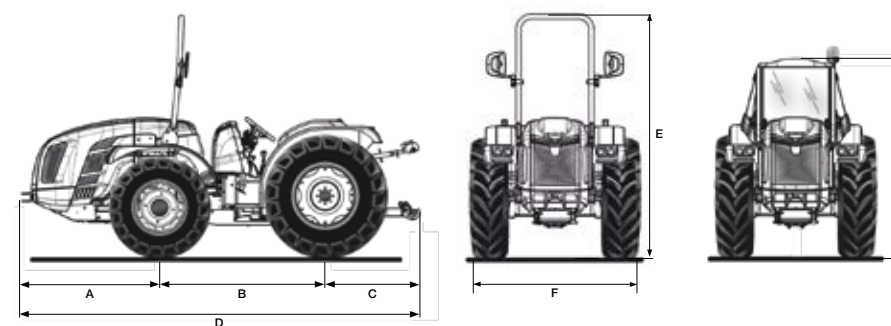

	A	B	C	D	E (with roll-bar)	E1 (with cab)	F	WEIGHT (roll-bar / cab)
RS	1348	1607	968	3923	2216 / 2316	1765 / 1865	1363 / 1878	2520 / 2700
DS®	1348	1607	968	3923	2216 / 2316	1765 / 1865	1363 / 1878	2570 / 2700

Dimensions in mm (min / max) - Weight in kg

MAIN OPTIONS




POWER SHUTTLE EASYDRIVE®



JOYSTICK



FRONT LIFT








CABIN CAT. 4

TRACTOR WITH DIFFERENTIATED WHEELS

SKY JUMP K90



-  AVAILABLE VERSIONS
DUALSTEER®
-  TRANSMISSION
16 + 16
-  POWER
75 hp
-  REAR LIFTING CAPACITY
2700 kg
-  DRIVING POSITION
Monodirectional

MAIN
OPTIONS



POWER
SHUTTLE
EASYDRIVE®



JOYSTICK



FRONT LIFT


ENGINE

KUBOTA, 4-cylinder, Turbo Common Rail

DISPLACEMENT	3769 cc
POWER	54.6 kW / 75 hp @2400 rpm
MAX TORQUE	305.4 Nm @1500 rpm

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 16 FWD + 16 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Multidisc in oil bath with electronically-managed
CHASSIS	Swinging integral chassis OS-Frame
DRIVE	4WD with front-wheel drive disengagement
REAR PTO	540/540E rpm, independent and synchronised
HYDRAULIC SYSTEM	Dual circuit with independent pumps and heat exchanger, up to 9 rear hydraulic outlets
REAR LIFTING CAPACITY	2700 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath with hydrostatic control, acting on four wheels
DRIVING POSITION	Platform suspended on silent blocks and suspended pedals
CABIN	Standard. 'Compact Pro' low-profile, pressurised and homologated cat. 4

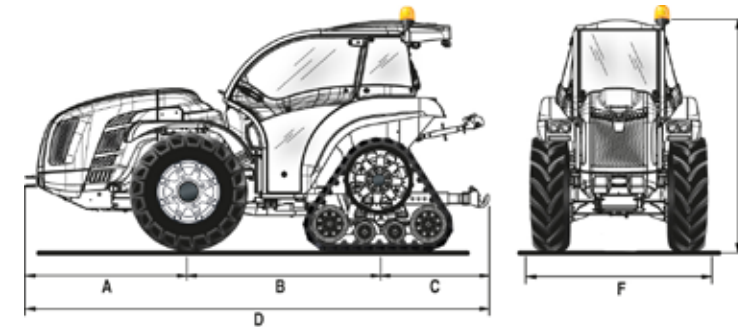






	A	B	C	D	E	F	WEIGHT
DS®	1348	1607	968	3923	1853	1350	3000

Dimensions in mm (min / max) - Weight in kg

RAPTOR 35



-  AVAILABLE VERSIONS
RS
-  TRANSMISSION
12 + 12
-  POWER
26 hp
-  REAR LIFTING CAPACITY
750 kg
-  DRIVING POSITION
Monodirectional

ENGINE

KOHLER, 4-cylinder	
DISPLACEMENT	1372 cc
POWER	18.8 kW / 25.6 hp @3000 rpm
MAX TORQUE	78 Nm @2000 rpm

TECHNICAL DATA

TRANSMISSION	Synchronised gearbox 12 FWD + 12 REV
SYNCHRONISED REVERSER	Yes
CLUTCH	Dual disc
CHASSIS	Rigid with steering wheels
DRIVE	4WD with front-wheel drive disengagement
REAR PTO	540 rpm, independent and synchronised
HYDRAULIC SYSTEM	Single-circuit, up to 6 rear hydraulic outlets
REAR LIFTING CAPACITY	750 kg (at the ball joint)
SERVICE BRAKES	Multidisc in oil bath, acting on the rear wheels
DRIVING POSITION	Footstep
CABIN	Not available


MAIN OPTIONS



FRONT LIFT WITH PTO



UNDER-BELLY PTO

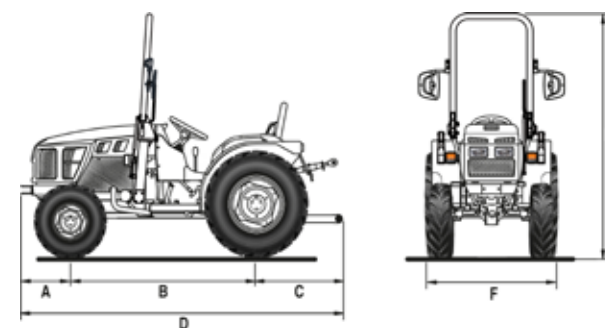

A	B	C	D	E	F	WEIGHT
424	1553	730	2707	1985 / 2025	1112 / 1513	1100

Dimensions in mm (min / max) - Weight in kg

THE SERVICES



SPARE PARTS

A complete range of original spare parts, guaranteed directly by the manufacturer.



ASSISTANCE

A team of specialists, well prepared and available to assure an efficient and resolving service.



LUBRICANTS

We recommend to use the original PowerLube lubricants.



M A D E I N I T A L Y